


OPPLE

2022

KATALOG PRODUK

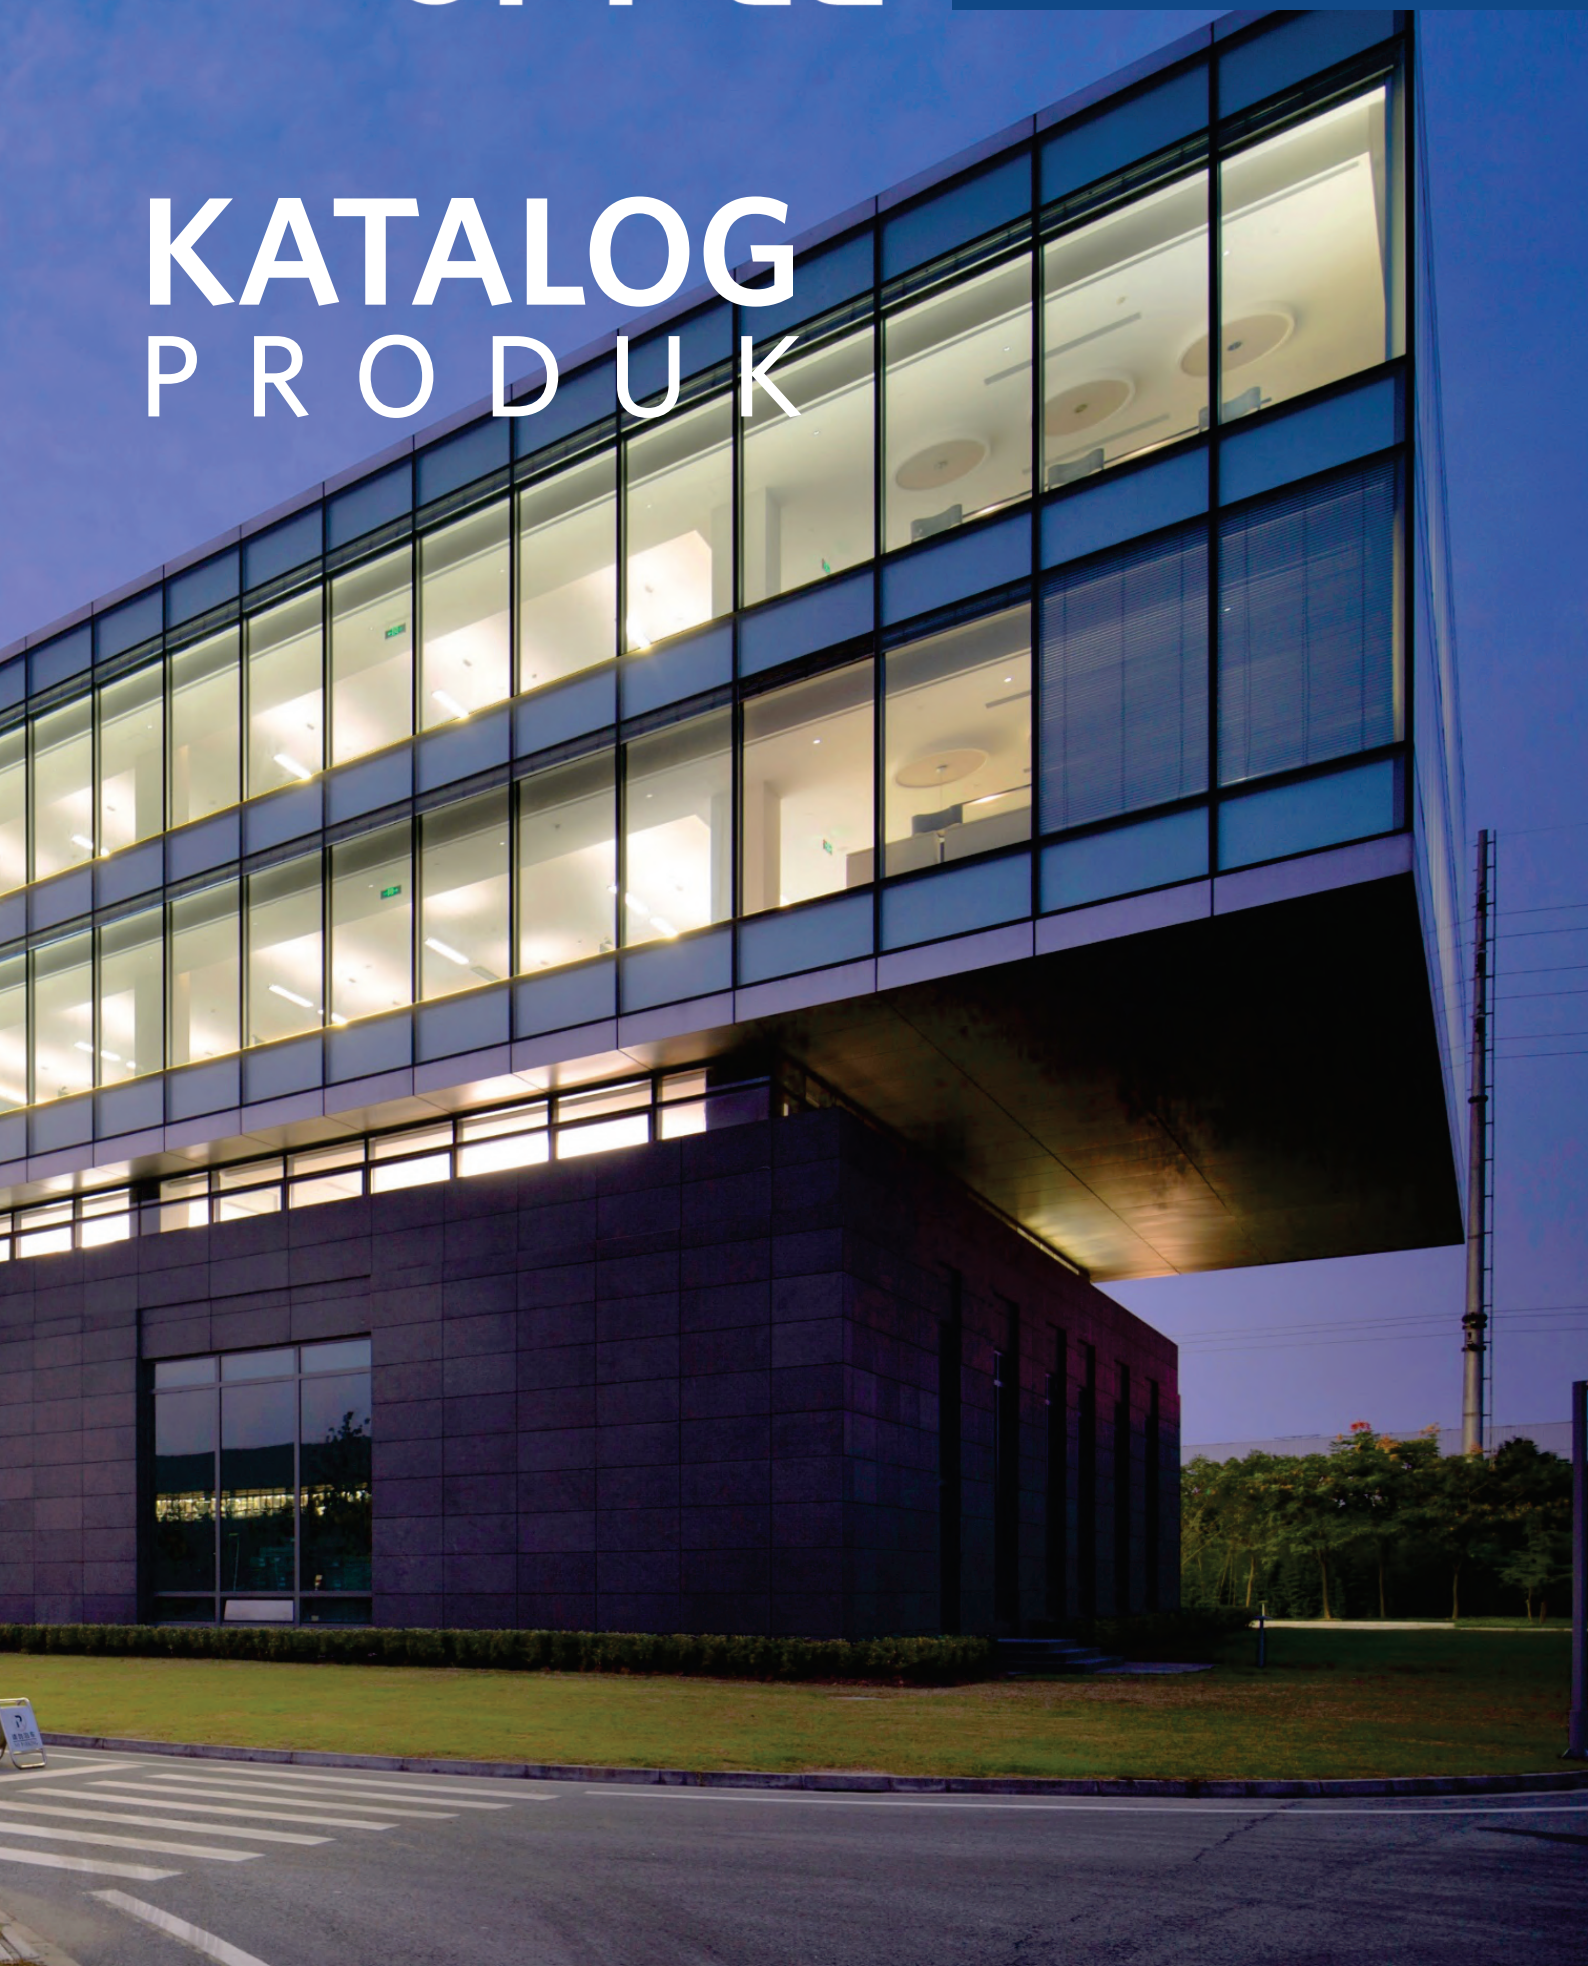

OPPLE
LIGHTING

A LEADING STOCKLISTED INTERNATIONAL BRAND OPERATIONS IN OVER 70 COUNTRIES



A TOP 10 GLOBAL LIGHTING BRAND

Number 1 in Myanmar,
China, Kuwait ..



100,000 POINT OF SALE WORLDWIDE

3,500 OPPLE brand shops..



HOLDS MORE THAN 1900 PATENTS

More than 400 patents are
currently being applied



5 CONSECUTIVE YEARS RANKED

Number 1 in sales
E-commerce on 11/11 event



TÜV CERTIFIED R&D LABORATORIES

400+ R&D team
> 25 Millions US\$
investment/year



2018 SALES 1.2 BILLIONS USD

Year on year growth over



6,000 EMPLOYEES WORLDWIDE

2 large ISO certified
factories



OPPLE
LIGHTING

WUJIANG LIGHTING CAMPUS

R&D Building



Manufacturing



Office and LAC



OPPLE Hotel



Warehouse



Dormitories



Manufacturing



Manufacturing




R&D Center

OPPLE Lighting holds a professional R&D team with more than 300 members, over 80 of whom hold a master's degree or above, a post-doctoral research station, and 10 Professional R&D Labs in Shanghai, Zhongshan, Suzhou and Eorupe. Most of the lab staff have MNC working experience

and extensive research backgrounds, and more than 26% hold master's or PhD degrees. The two R&D center have been establishing strategic partnerships with many world-leading organizations such as Huawei, oneTLED and Zigbee.



Industry 4.0



In 2016, the first robot arm was used for automatic inspection of molds, marking the official introduction of Industry 4.0.

LED DOWNLIGHT & SPOTLIGHT

BRIGHTER  **25%**
THAN BRIGHT



Professional Lighting



Higher
Brightness



Uniform
Light Colors



High Efficiency

Ultimate Quality



5yrs Care Free



650°C Antistatic



TUV Approved



3yrs Warranty

Eye Care



No Blue Light



Flicker Free

Professional Luminaries

Photo	General Information	Product Description	Lumen (lm)	Packing Quantity (Pcs)
-------	---------------------	---------------------	------------	------------------------

LED DOWNLIGHT HM SERIES



Power Factor	: 0,7
CRI	: 80
Base	: -
Beam Angle	: 75° - 80°
Voltage	: 220 - 240
Lifetime (hours)	: 30.000
CCT (K)	: 3000 / 4000 / 5700

LEDDOWNLIGHTRC-HM R82-5W-WH-GP	330 - 400	18
LEDDOWNLIGHTRC-HM R100-6W-WH-GP	420 - 520	18
LEDDOWNLIGHTRC-HM R120-9W-WH-GP	700 - 850	6
LEDDOWNLIGHTRC-HM R175-14W-WH-GP	1.100 - 1.400	6
LEDDOWNLIGHTRC-HM R210-29W-WH-GP	2.300 - 2.700	6
LEDDOWNLIGHTRC-HM R210-42W-WH-GP	3.300 - 4.200	6

LED DOWNLIGHT ESIII ROUND



Power Factor	: 0,5
CRI	: 80
Base	: -
Beam Angle	: 120°
Voltage	: 220 - 240
Lifetime (hours)	: 30.000
CCT (K)	: 3000 / 4000 / 6500

LEDDOWNLIGHTRC-ESIII R100-6W-WH-NV	450 - 480	30
LEDDOWNLIGHTRC-ESIII R150-12W-WH-NV	900 - 960	20
LEDDOWNLIGHTRC-ESIII R200-18W-WH-NV	1.350 - 1.440	10
LEDDOWNLIGHTRC-ESIII R200-24W-WH-NV	1.800 - 1.920	10

LED DOWNLIGHT ESIII SQUARE



Power Factor	: 0,5
CRI	: 80
Base	: -
Beam Angle	: 120°
Voltage	: 220 - 240
Lifetime (hours)	: 30.000
CCT (K)	: 3000 / 4000 / 6500

LEDDOWNLIGHTRC-ESIII S100-6W-WH-NV	450 - 480	30
LEDDOWNLIGHTRC-ESIII S150-12W-WH-NV	900 - 960	20
LEDDOWNLIGHTRC-ESIII S200-18W-WH-NV	1.350 - 1.440	10
LEDDOWNLIGHTRC-ESIII S200-24W-WH-NV	1.800 - 1.920	10

LED DOWNLIGHT HPF ESIII ROUND



Power Factor	: 0,9
CRI	: 80
Base	: -
Beam Angle	: 120°
Voltage	: 220 - 240
Lifetime (hours)	: 30.000
CCT (K)	: 3000 / 4000 / 6500

LEDDOWNLIGHTRC-HPF ESIII R100-6W-WH	480	30
LEDDOWNLIGHTRC-HPF ESIII R150-12W-WH	960	20
LEDDOWNLIGHTRC-HPF ESIII R200-18W-WH	1.440	10
LEDDOWNLIGHTRC-HPF ESIII R200-24W-WH	1.920	10

LED DOWNLIGHT HPF ESIII SQUARE



Power Factor	: 0,9
CRI	: 80
Base	: -
Beam Angle	: 120°
Voltage	: 220 - 240
Lifetime (hours)	: 30.000
CCT (K)	: 3000 / 4000 / 6500

LEDDOWNLIGHTRC-HPF ESIII S100-6W-WH	480	30
LEDDOWNLIGHTRC-HPF ESIII S150-12W-WH	960	20
LEDDOWNLIGHTRC-HPF ESIII S200-18W-WH	1.440	10
LEDDOWNLIGHTRC-HPF ESIII S200-24W-WH	1.920	10

LED DOWNLIGHT US



Power Factor	: 0,5
CRI	: 80
Base	: -
Beam Angle	: 100° - 110°
Voltage	: 220 - 240
Lifetime (hours)	: 20.000
CCT (K)	: 2700 / 4000 / 5700 / 6500

LEDDOWNLIGHTRC-US R70-4W-6500-WH-GP	230 - 250	60
LEDDOWNLIGHTRC-US R85-6W-6500-WH-GP	400 - 450	60
LEDDOWNLIGHTRC-US R125-9W-6500-WH-GP	720 - 765	30
LEDDOWNLIGHTRC-US R150-12W-6500-WH-GP	960 - 1.020	30
LEDDOWNLIGHTRC-US R175-18W-6500-WH-GP	1.440 - 1.530	16
LEDDOWNLIGHTRC-US R200-22W-6500-WH-GP	1.760 - 1.870	16

LED SPOTLIGHT HS WHITE





Power Factor	: 0,5
CRI	: 80
Base	: -
Beam Angle	: 36°
Voltage	: 220 - 240
Lifetime (hours)	: 20.000
CCT (K)	: 3000 / 4000

LEDSPOTLIGHTRA-HS R70-4.5W-WH-GP	300 - 330	45
----------------------------------	-----------	----

Professional Luminaries


Photo	General Information	Product Description	Lumen (lm)	Packing Quantity (Pcs)
LED SPOTLIGHT SILVER				
	Power Factor : 0,5 CRI : 80 Base : - Beam Angle : 36° Voltage : 220 - 240 Lifetime (hours) : 20.000 CCT (K) : 3000 / 5700	LEDSPOTLIGHTRA-HS R70-7W-WH-GP	400 - 430	45
LED SPOTLIGHT US				
	Power Factor : 0,5 CRI : 80 Base : - Beam Angle : 24° Voltage : 220 - 240 Lifetime (hours) : 20.000 CCT (K) : 3000 / 4000 / 5700	LEDSPOTLIGHTRA-US R70-4W-WH-GP LEDSPOTLIGHTRA-US R70-6W-WH-GP LEDSPOTLIGHTRA-US R70-8W-WH-GP	270 - 290 400 - 450 550 - 600	60 60 60
LED DOWNLIGHT ESII				
	Power Factor : 0,45 - 0,5 CRI : 80 Base : - Beam Angle : 110° Voltage : 220 - 240 Lifetime (hours) : 30.000 CCT (K) : 3000 / 4000 / 6000	LEDDOWNLIGHTRC-ESII R100-6W-WH-NV LEDDOWNLIGHTRC-ESII R150-12W-WH-NV LEDDOWNLIGHTRC-ESII R200-18W-WH-NV LEDDOWNLIGHTRC-ESII R200-24W-WH-NV	380 - 400 810 - 850 1.250 - 1.300 1.620 - 1.700	20 10 10 10
LED DOWNLIGHT ECOMAX II SM				
	Power Factor : 0,5 CRI : 80 Base : - Beam Angle : 110° Voltage : 220 - 240 Lifetime (hours) : 30.000 CCT (K) : 3000 / 4000 / 6000	LEDDOWNLIGHTSM-ESII R100-6W-WH-NV LEDDOWNLIGHTSM-ESII R150-12W-WH-NV LEDDOWNLIGHTSM-ESII R200-18W-WH-NV LEDDOWNLIGHTSM-ESII R200-24W-WH-NV	450 1.000 1.500 2.000	30 20 10 10
LED DOWNLIGHT ECOMAX II SM				
	Power Factor : 0,5 CRI : 80 Base : - Beam Angle : 110° Voltage : 220 - 240 Lifetime (hours) : 30.000 CCT (K) : 3000 / 4000 / 6000	LEDDOWNLIGHTSM-ESII S100-6W-6000-WH-NV LEDDOWNLIGHTSM-ESII S150-12W-6000-WH-NV LEDDOWNLIGHTSM-ESII S200-18W-6000-WH-NV LEDDOWNLIGHTSM-ESII S200-24W-6000-WH-NV	450 1.000 1.500 2.000	30 20 10 10
LED SPOTLIGHT TRACK UTILITY				
	Power Factor : 1 CRI : 90 Base : - Beam Angle : 30° Voltage : 220 - 240 Lifetime (hours) : 20.000 CCT (K) : 3000 / 6500	LEDSPOTSM-U 5W-30D-WH-GP LEDSPOTSM-U 7W-30D-WH-GP	250 350	48 48

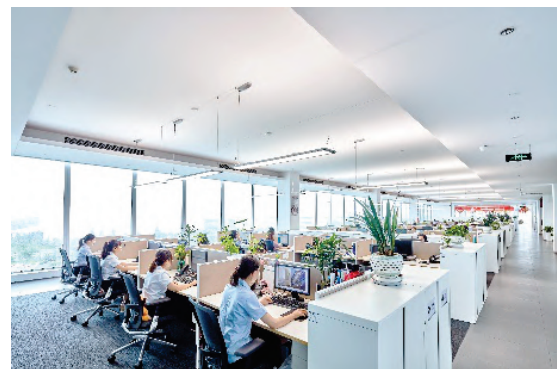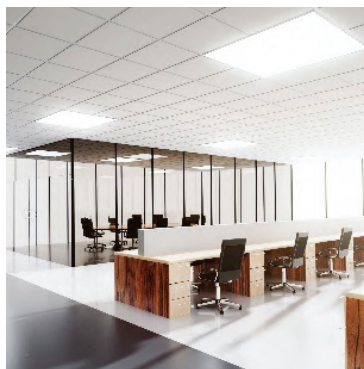

Professional Luminaries

LED PANEL & LINEAR



EcoMAX IV-A New Generation
OPTICAL GRADE PMMA
NEVER FADING 

Professional Lighting



Higher
Brightness



Light
Transmittance



High Efficiency

Ultimate Quality



Never Fading



10yrs Care Free



TUV Approved



2yrs Warranty

Eye Care



No Blue Light



Flicker Free

Photo	General Information	Product Description	Lumen (lm)	Packing Quantity (Pcs)
LED SLIM PANEL ECOMAX				
	Power Factor	: 0,95		
	CRI	: U80		
	Base	: G13		
	Beam Angle	: 120°		
	Voltage	: 220 - 240		
	Lifetime (hours)	: 30.000		
	CCT (K)	: 3000 / 4000 / 6500		
		LEDSPANELRC-SL SQ595-40W-WH IV	4.000	4
		LEDSPANELRC-SL SQ595-40W-WH IV IP44	4.000	4
		LEDSPANELRC-SL SQ603-40W-WH IV	4.000	4

LED SLIM PANEL ECOMAX

	Power Factor	: 0,95		
	CRI	: U80		
	Base	: G13		
	Beam Angle	: 120°		
	Voltage	: 220 - 240		
	Lifetime (hours)	: 30.000		
	CCT (K)	: 3000 / 4000 / 6500		
		LEDSPANELRC-SL RE295-40W-WH IV	4.000	4

LED SLIM PANEL DRIVER

	Power Factor	: -		
	CRI	: -		
	Base	: -		
	Beam Angle	: -		
	Voltage	: -		
	Lifetime (hours)	: -		
	CCT (K)	: -		
		LEDSPANEL 40W DRIVER 220V	-	-
		LEDSPANEL SUSPENDED ROPE 595	-	-
		LEDSPANEL SUSPENDED ROPE 295	-	-
		LEDSPANELRC-SL SQ595-SURFACE MODULE-WH	-	-
		LEDSPANEL CLIP 595	-	-
		LEDSPANEL CLIP 295	-	-

Professional Luminaries

INDUSTRIAL & OUTDOOR LIGHTING EXPERT

Professional Lighting



Higher
Brightness



Precise
Light Control



Higher
Efficiency

Intimate Experience



Smart Control

Ultimate Quality



15yrs Care Free



IP66 Waterproof
Against Heavy Seas



Dustproof



Rustproof



IK08 Shockproof



Wide Withstand
Voltage



LED Highbay Performer IV



Power Factor	: 0,95
CRI	: U70
Base	: -
Beam Angle	: 60° / 100° / 60°+100°
Voltage	: AC 100 - 240
Lifetime (hours)	: 70.000
CCT (K)	: 4000 / 5700

LEDHighbay-P4 80W-GY-GP	12.400 - 12.800	2
LEDHighbay-P4 110W-GY-GP	17.050	2
LEDHighbay-P4 155W-GY-GP	24.025 - 24.800	2
LEDHighbay-P4 215W-GY-GP	32.250 - 33.325	2

LED Highbay ECOMAX II



Power Factor	: 0,95
CRI	: U80
Base	: -
Beam Angle	: 60° / 90°
Voltage	: AC 220 - 240
Lifetime (hours)	: 50.000
CCT (K)	: 5700

LEDHighbay-E II 50W-GY-GP	6.500	2
LEDHighbay-E II 100W-GY-GP	13.000	2
LEDHighbay-E II 150W-GY-GP	19.500	2
LEDHighbay-E II 200W-GY-GP	26.000	2
LEDHighbay-E II 240W-GY-GP	31.200	2

LED Highbay ECOMAX ACCESSORY



Power Factor	: -
CRI	: -
Base	: -
Beam Angle	: -
Voltage	: -
Lifetime (hours)	: -
CCT (K)	: -

HIGHBAY-E II POLE-MOUNTED ACCESSORY	-	8
HIGHBAY-E II WALL-MOUNTED ACCESSORY	-	8
HIGHBAY-E II REFLECTOR ACCESSORY 100W	-	8
HIGHBAY-E II REFLECTOR ACCESSORY 150W	-	8
HIGHBAY-E II REFLECTOR ACCESSORY 200W	-	8



Professional Luminaries

Photo	General Information	Product Description	Lumen (lm)	Packing Quantity (Pcs)	
LED LOWBAY ECOMAX II					
	Power Factor	: 0,95	LEDLOWBAY-E II 100W-SL-GP	10.000	1
	CRI	: U80	LEDLOWBAY-E II 150W-SL-GP	15.000	1
	Base	: -	LEDLOWBAY-E II 200W-SL-GP	20.000	1
	Beam Angle	: 60° / 90°	LEDLOWBAY-E II 35W-SL-GP	3.500	2
	Voltage	: AC 220 - 240	LEDLOWBAY-E II 50W-SL-GP	5.000	2
	Lifetime (hours)	: 30.000	LEDLOWBAY-E II 70W-SL-GP	7.000	2
	CCT (K)	: 5700			

LED CANOPY PERFORMER

	Power Factor	: 0,95	LED CANOPY-P 120W-MB-R LED CANOPY-P 120W-WB-R	12.600 - 13.800 12.600 - 13.800	1 1
	CRI	: U80			
	Base	: -			
	Beam Angle	: 60° / 100°			
	Voltage	: AC 220 - 240			
	Lifetime (hours)	: 60.000			
	CCT (K)	: 4000 / 5700			

LED CANOPY PERFORMER

	Power Factor	: 0,95	LED CANOPY-P 120W-MB-C LED CANOPY-P 120W-WB-C	12.600 - 13.800 12.600 - 13.800	1 1
	CRI	: U80			
	Base	: -			
	Beam Angle	: 60° / 100°			
	Voltage	: AC 220 - 240			
	Lifetime (hours)	: 50.000			
	CCT (K)	: 4000 / 5700			

LED CANOPY PERFORMER

	Power Factor	: 0,95	LED S LIGHT-P 120W-AS-P	13.800	1
	CRI	: U80			
	Base	: -			
	Beam Angle	: Asymetric			
	Voltage	: AC 220 - 240			
	Lifetime (hours)	: 60.000			
	CCT (K)	: 5700			

LED WATERPROOF UTILITY3

	Power Factor	: 0,5 / 0,9	LED WATERPROOF-U3 L600-20W-FR-GP LED WATERPROOF-U3 L1200-40W-FR-GP LED WATERPROOF-U3 L1500-60W-FR-GP	2.200 4.400 6.600	16 12 12
	CRI	: U80			
	Base	: -			
	Beam Angle	: 130° + 110°			
	Voltage	: AC 220 - 240			
	Lifetime (hours)	: 30.000			
	CCT (K)	: 4000 / 6500			

LED WATERPROOF UQ SERIES

	Power Factor	: 0,95	LED WATERPROOF-UQ L600-7.5W-FR-GP LED WATERPROOF-UQ L1200-15W-FR-GP LED WATERPROOF-UQ L1200-30W-FR-GP	620 1.300 2.850	30 30 30
	CRI	: U80			
	Base	: -			
	Beam Angle	: 130° + 110°			
	Voltage	: AC 220 - 240			
	Lifetime (hours)	: 30.000			
	CCT (K)	: 4000 / 5700			

LED WATERPROOF EP SERIES

	Power Factor	: -	LED WATERPROOF-EP L600-2T-DB-GP LED WATERPROOF-EP L1200-2T-SG-GP LED WATERPROOF-EP L1200-2T-DB-GP LED WATERPROOF-EP L1500-2T-SG-GP	/ / / /	10 8 8 8
	CRI	: -			
	Base	: -			
	Beam Angle	: -			
	Voltage	: AC100-240V(Follow LED T8)			
	Lifetime (hours)	: -			
	CCT (K)	: -			

Professional Luminaries

Photo	General Information	Product Description	Lumen (lm)	Packing Quantity (Pcs)
LED FLOODLIGHT ECOMAX II				
	Power Factor	: 0,95		
	CRI	: U80		
	Base	: -		
	Beam Angle	: 40°+80°		
	Voltage	: 220 - 240		
	Lifetime (hours)	: 30.000		
	CCT (K)	: 3000 / 4000 / 6000		
		LED FLOODLIGHT-E II 30W-GY-GP	2.400 - 2.500	18
		LED FLOODLIGHT-E II 50W-GY-GP	4.000 - 4.200	12
		LED FLOODLIGHT-E II 70W-GY-GP	5.800 - 6.000	6
		LED FLOODLIGHT-E II 100W-GY-GP	9.200 - 9.400	6
LED FLOODLIGHT ECOMAX H				
	Power Factor	: 0,95		
	CRI	: U80		
	Base	: -		
	Beam Angle	: 60° / 72°+28°		
	Voltage	: 220 - 240		
	Lifetime (hours)	: 30.000		
	CCT (K)	: 3000 / 4000 / 5700		
		LED FLOODLIGHT-E II 150W-GY-GP	13.650 - 15.000	4
		LED FLOODLIGHT-E II 200W-GY-GP	18.200 - 19.500	4
LED FLOODLIGHT ECOMAX BRACKET				
	Power Factor	: -		
	CRI	: -		
	Base	: -		
	Beam Angle	: -		
	Voltage	: -		
	Lifetime (hours)	: -		
	CCT (K)	: -		
		FLOODLIGHT ECOMAX 2X150W BRACKET	-	1
		FLOODLIGHT ECOMAX 2X200W BRACKET	-	1
LED FLOODLIGHT ECOMAX III				
	Power Factor	: 0,95		
	CRI	: U80		
	Base	: -		
	Beam Angle	: 45° / 80° / 120°+30°		
	Voltage	: 220 - 240		
	Lifetime (hours)	: 50.000		
	CCT (K)	: 3000 / 4000 / 5700		
		LED FLOODLIGHT-E III 150W-GY-GP	19.500	3
		LED FLOODLIGHT-E III 200W-GY-GP	26.000	3
		LED FLOODLIGHT-E III 250W-GY-GP	32.500	3
		LED FLOODLIGHT-E III 300W-GY-GP	39.000	3
LED FLOODLIGHT EQ II				
	Power Factor	: 0,95		
	CRI	: U80		
	Base	: -		
	Beam Angle	: -		
	Voltage	: 80°		
	Lifetime (hours)	: 25.000		
	CCT (K)	: 3000 / 4000 / 5700		
		LED FLOODLIGHT-EQII 30W-GY-GP	2.700 - 2.850	10
		LED FLOODLIGHT-EQII 50W-GY-GP	4.500 - 4.750	6
		LED FLOODLIGHT-EQII 100W-GY-GP	9.000 - 9.500	6
LED FLOODLIGHT EQ H				
	Power Factor	: 0,95		
	CRI	: U80		
	Base	: -		
	Beam Angle	: -		
	Voltage	: 35 x 80°		
	Lifetime (hours)	: 30.000		
	CCT (K)	: 3000 / 4000 / 5700		
		LED FLOODLIGHT-EQ 150W-GY-GP-SPD	14.250 - 15.000	4
		LED FLOODLIGHT-EQ 200W-GY-GP-SPD	19.000 - 20.000	4
LED FLOODLIGHT EQ				
	Power Factor	: 0,95		
	CRI	: U80		
	Base	: -		
	Beam Angle	: 100° - 120°		
	Voltage	: 220 - 240		
	Lifetime (hours)	: 30.000		
	CCT (K)	: 3000 / 4000 / 6500		
		LED FLOODLIGHT-EQ 10W-6500-GY-GP-VLT	800	8
		LED FLOODLIGHT-EQ 20W-6500-GY-GP-VLT	1600	8
		LED FLOODLIGHT-EQ 30W-6500-GY-GP-VLT	2400	8
		LED FLOODLIGHT-EQ 50W-6500-GY-GP-VLT	4.000	6
		LED FLOODLIGHT-EQ 70W-6500-GY-GP-VLT	5.600	6
		LED FLOODLIGHT-EQ 100W-6500-GY-GP-VLT	8.000	4

Professional Luminaries

Photo	General Information	Product Description	Lumen (lm)	Packing Quantity (Pcs)	
LED OUTDOOR SPOT ECOMAX II					
	Power Factor	: 0,5	LED OUTDOOR SPOT-EII 9W-4000-8D-GY-GP LED OUTDOOR SPOT-EII 18W-4000-8D-GY-GP LED OUTDOOR SPOT-EII 36W-4000-8D-GY-GP	580 - 810 1.440 - 1.700 2.560 - 3.260	12 6 4
	CRI	: 80			
	Base	: -			
	Beam Angle	: 8° / 12° / 24° / 36°			
	Voltage	: 220 - 240			
Lifetime (hours)	: 30.000				
CCT (K)	: 3000 / 4000				
LED OUTDOOR SPOT ECOMAX SPIKE					
	Power Factor	: -	LED OUTDOOR SPOT-E SPIKE-BL	-	20
	CRI	: -			
	Base	: -			
	Beam Angle	: -			
	Voltage	: -			
Lifetime (hours)	: -				
CCT (K)	: -				
LED INGORUND ECOMAX					
	Power Factor	: -	LED INGROUND-E 1W-GP	70	20
	CRI	: 80			
	Base	: -			
	Beam Angle	: 15° / 30°			
	Voltage	: 24 DC			
Lifetime (hours)	: 30.000				
CCT (K)	: 3000 / 4000				
LED INGROUND ECOMAX					
	Power Factor	: -	LED INGROUND-E 3W-GP LED INGROUND-E 6W-GP LED INGROUND-E 15W-GP LED INGROUND-E 36W-GP	270 550 1.400 3.200	8 8 4 2
	CRI	: 80			
	Base	: -			
	Beam Angle	: 20° / 45°			
	Voltage	: 24 DC			
Lifetime (hours)	: 30.000				
CCT (K)	: 3000 / 4000				
LED BOLLARD ECOMAX					
	Power Factor	: 0,5	LED BOLLARD-E2 H500 10W-BK-GP	480	6
	CRI	: 80			
	Base	: -			
	Beam Angle	: -			
	Voltage	: AC 100 - 240			
Lifetime (hours)	: 25.000				
CCT (K)	: 3000 / 4000 / 5700				



Professional Luminaries

INDUSTRIAL & OUTDOOR LIGHTING EXPERT

Professional Lighting

Higher
BrightnessPrecise
Light ControlHigher
Efficiency

Intimate Experience



Smart Control

Ultimate Quality



15yrs Care Free

IP66 Waterproof
Against Heavy Seas

Windproof



IK08 Shockproof



Wide Voltage



Photo	General Information	Product Description	Lumen (lm)	Packing Quantity (Pcs)
-------	---------------------	---------------------	------------	------------------------

LED STREETLIGHT EQ SERIES



Power Factor	: 0,9 / 0,95
CRI	: U80 / U70
Base	: -
Beam Angle	: 150°+70°
Voltage	: AC 220 - 240
Lifetime (hours)	: 30.000
CCT (K)	: 3000 / 4000 / 5700

LEDSTREETLIGHT-EQ20W-GY-GP2	1.950 - 2.050	12
LEDSTREETLIGHT-EQ 40W-GY-GP	3.680 - 4.000	6
LEDSTREETLIGHT-EQ 60W-GY-GP	7.000 - 7.500	6

LED STREETLIGHT EQ SERIES



Power Factor	: 0,95
CRI	: U70
Base	: -
Beam Angle	: 150°+70°
Voltage	: AC 220 - 240
Lifetime (hours)	: 50.000
CCT (K)	: 3000 / 5700

LEDSTREETLIGHT-EQ60W-GY-GP2	7.200 - 7.500	6
-----------------------------	---------------	---

LED STREETLIGHT EA SERIES



Power Factor	: 0,95
CRI	: U70
Base	: -
Beam Angle	: 150°+88°
Voltage	: AC 100 - 240
Lifetime (hours)	: 30.000
CCT (K)	: 3000 / 4000 / 5700

LED STREETLIGHT-EAM 80W-GY-GP	8.000 - 8.800	1
LED STREETLIGHT-EAM 100W-GY-GP	10.000 - 11.000	1

Professional Luminaries

Photo	General Information	Product Description	Lumen (lm)	Packing Quantity (Pcs)
LED STREETLIGHT PQ SERIES				
	Power Factor	: 0,95		
	CRI	: U70		
	Base	: -		
	Beam Angle	: 150°+70°		
	Voltage	: AC 220 - 240		
	Lifetime (hours)	: 50.000		
	CCT (K)	: 3000 / 4000 / 5700		
		LEDSTREETLIGHT-PQ 100W-LG-GP	11.500 - 12.000	2
		LEDSTREETLIGHT-PQ 120W-LG-GP	13.200 - 14.400	2
		LEDSTREETLIGHT-PQ 150W-LG-GP	15.000 - 16.500	2


OPPLE EMERGENCY ESCAPE SIGN (Recessed/Suspended/Wall-Mounted)

	Power Factor	: -	OP-BLZD-1LROE I 3W-Z104-Re-EXIT	-	20
	CRI	: -	OP-BLZD-1LROE I 3W-Z104-Re-DEXIT	-	20
	Base	: -	OP-BLZD-1LROE I 3W-Z104-Re-LEXIT	-	20
	Beam Angle	: -	OP-BLZD-1LROE I 3W-Z104-Re-REXIT	-	20
	Voltage	: AC 220 - 240	OP-Z104-Recessedbox	-	60
	Lifetime (hours)	: 20.000	OP-BLZD-2LROE I 3W-Z103-Sp-EXIT-D	-	40
	CCT (K)	: -	OP-BLZD-2LROE I 3W-Z103-Sp-EXIT-D	-	40
			OP-BLZD-2LROE I 3W-Z103-Sp-DEXIT-D	-	40
			OP-BLZD-1LROE I 3W-Z103-Wall-EXIT-S	-	40
			OP-BLZD-1LROE I 3W-Z103-Wall-EXIT-S	-	40
			OP-BLZD-1LROE I 3W-Z103-Wall-EXIT-S	-	40
			OP-BLZD-1LROE I 3W-Z103-Wall-EXIT-S	-	40
			OP-BLZD-1LROE I 3W-Z103-Wall-EXIT-S	-	40
			OP-BLZD-1LROE I 3W-Z103-Wall-EXIT-S	-	40
			OP-BLZD-1LROE I 3W-Z103-Wall-EXIT-S	-	40

LED SOLAR STREET ECOMAX

	Power Factor	: -	LED SolarStreet-EA 50W-GD-GP	8.000	1
	CRI	: U70	LED SolarStreet-EA 60W-GD-GP	9.600	1
	Base	: -	LED SolarStreet-EA 70W-GD-GP	11.200	1
	Beam Angle	: -	LED SolarStreet-EA 90W-GD-GP	14.400	1
	Voltage	: AC 220 - 240			
	Lifetime (hours)	: 50.000			
	CCT (K)	: -			

OPPLE SOLAR POLY

	Power Factor	: -	OPL-Solar-Poly PV-130W-18V-GP	-	35
	CRI	: -	OPL-Solar-Poly PV-160W-18V-GP	-	25
	Base	: -	OPL-Solar-Poly PV-200W-18V-GP	-	35
	Beam Angle	: -	OPL-Solar-Poly PV-260W-18V-GP	-	25
	Voltage	: -			
	Lifetime (years)	: 25			
	CCT (K)	: -			

OPPLE SOLAR LiFePO4

	Power Factor	: -	OPL-Solar-LiFePO4-12.8V-54Ah/W CC	-	2
	CRI	: -	OPL-Solar-LiFePO4-25.6V-42Ah/W CC	-	2
	Base	: -	OPL-Solar-LiFePO4-25.6V-50Ah/W CC	-	2
	Beam Angle	: -	OPL-Solar-LiFePO4-25.6V-60Ah/W CC	-	2
	Voltage	: -			
	Lifetime (cycles)	: 2			
	CCT (K)	: -			



LED BULB

10^{YRS}
AS NEW

Professional Lighting



Ultimate Quality



Eye Care



Photo	General Information	Product Description	Lumen (lm)	Packing Quantity (Pcs)
LED ECOMAX STICK LAMP				
	Power Factor	: 0,5		
	CRI	: 80		
	Base	: E27		
	Beam Angle	: 180°		
	Voltage	: 220 - 240		
	Lifetime (hours)	: 20.000		
	CCT (K)	: 3000 / 4000 / 6500		
		LED-E-STICK-E27-8W-CT	800 - 900	100
		LED-E-STICK-E27-11W-CT	1.100 - 1.200	100
		LED-E-STICK-E27-13W-CT	1.300 - 1.450	100
		LED-E-STICK-E27-15W-CT	1.500 - 1.700	100

LED ECOMAX BULB



Power Factor	: 0,5	LED-E1-P45-E27-3WK-CT	220 - 250	100
CRI	: 80	LED-E1-P45-E27-5WK-CT	400 - 450	100
Base	: E27	LED-E1-A55-E27-7WK-CT	600 - 650	50
Beam Angle	: 180°	LED-E1-A60-E27-9WK-CT	750 - 810	50
Voltage	: 220 - 240	LED-E1-A70-E27-12WK-CT	1.050 - 1.150	50
Lifetime (hours)	: 20.000	LED-E1-A70-E27-14WK-CT	1.300 - 1.400	50
CCT (K)	: 3000 / 4000 / 6500			


LED ECO SAVE1 HIGH POWER BULB



Power Factor	: 0,5	LED-ECO SAVE1-HPB-E27-20WK-CT	2.000	20
CRI	: 80	LED-ECO SAVE1-HPB-E27-30WK-CT	3.000	20
Base	: E27	LED-ECO SAVE1-HPB-E27-40WK-CT	4.000	10
Beam Angle	: 200°	LED-ECO SAVE1-HPB-E27-50WK-CT	5.000	8
Voltage	: 220 - 240			
Lifetime (hours)	: 20.000			
CCT (K)	: 6500			

Light Source

Photo	General Information	Product Description	Lumen (lm)	Packing Quantity (Pcs)
LED ECOMAX2 SPOT LAMP				
	Power Factor	: -		
	CRI	: >80		
	Base	: GU5.3		
	Beam Angle	: 36°		
	Voltage	: 12 A/DC		
	Lifetime (hours)	: 20.000		
	CCT (K)	: 2700 / 4000 / 6500		
		LED-E2-MR16-5W-36DK-CT LED-E2-MR16-6W-36DK-CT LED-E2-MR16-8W-36DK-CT	380 - 400 480 - 500 700 - 760	100 100 100
LED ECOMAX2 SPOT LAMP				
	Power Factor	: 0,5		
	CRI	: >80		
	Base	: GX5.3		
	Beam Angle	: 36°		
	Voltage	: 220 - 240		
	Lifetime (hours)	: 20.000		
	CCT (K)	: 2700 / 4000 / 6500		
		LED-E2-GX5.3-4.5W-36DK-CT LED-E2-GX5.3-6W-36DK-CT LED-E2-GX5.3-8W-36DK-CT	400 - 430 500 - 550 720 - 760	100 100 100
LED ECOMAX2 SPOT LAMP				
	Power Factor	: 0,5		
	CRI	: >80		
	Base	: GX5.3		
	Beam Angle	: 36°		
	Voltage	: 220 - 240		
	Lifetime (hours)	: 20.000		
	CCT (K)	: 2700 / 4000 / 6500		
		LED-E2-GX5.3-5W-DIM-36DK-CT LED-E2-GX5.3-6W-DIM-36DK-CT LED-E2-GX5.3-7.5W-DIM-36DK-CT	400 500 650 - 690	100 100 100
LED ECOMAX FILAMENT BULB A60				
	Power Factor	: 0,5		
	CRI	: 80		
	Base	: E27		
	Beam Angle	: 360°		
	Voltage	: 220 - 240		
	Lifetime (hours)	: 20.000		
	CCT (K)	: 2700		
		LED-E-A60-E27-4W-FILAK-CT-TR LED-E-A60-E27-6W-FILAK-CT-TR LED-E-A60-E27-8W-FILAK-CT-TR	470 806 1.055	100 100 100
LED ECOMAX FILAMENT BULB ST64				
	Power Factor	: 0,5		
	CRI	: 80		
	Base	: E27		
	Beam Angle	: 360°		
	Voltage	: 220 - 240		
	Lifetime (hours)	: 20.000		
	CCT (K)	: 2700		
		LED-E-ST64-E27-4W-FILAK-CT-TR LED-E-ST64-E27-6W-FILAK-CT-TR LED-E-ST64-E27-8W-FILAK-CT-TR	470 806 1.055	40 40 40

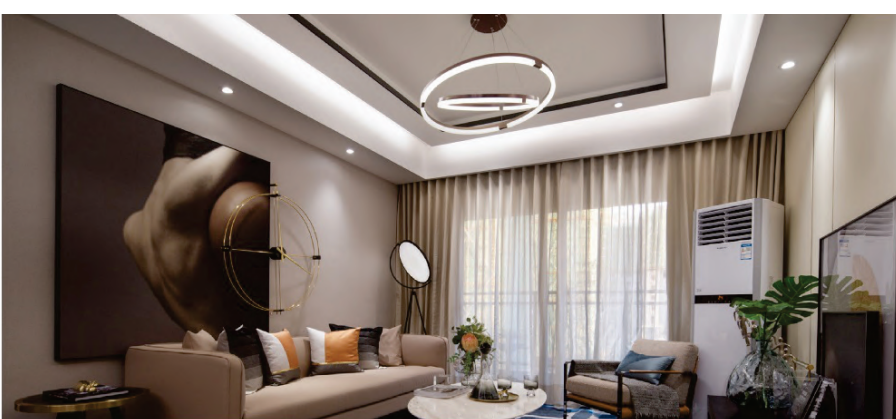

LED BATTEN

BRIGHTER THAN BRIGHT

Professional Lighting



Ultimate Quality



Anti-shock



650°C Antiflaming



TUV Approved



95%
conversion
efficiency



EMC Approved



2yrs Warranty

Eye Care



No Blue Light



Flicker Free



Plug and Play



Solid Connection



Long Connection



All-Match

Intimate Experience


Photo	General Information	Product Description	Lumen (lm)	Packing Quantity (Pcs)
LED ECOMAX1 T5 BATTEN				
	Power Factor	: 0,5	300	30
	CRI	: 75	600	30
	Base	: -	900	30
	Beam Angle	: -	1.200	30
	Voltage	: 220 - 240		30
	Lifetime (hours)	: 20.000		30
	CCT (K)	: 3000 / 4000 / 5700		30
		LED-E1-T5 BATTEN-310MM-3.5W LED-E1-T5 BATTEN-570MM-7W LED-E1-T5BATTEN-870MM-10.5W LED-E1-T5 BATTEN-1170MM-14W LEADER CABLE JUMPER CABLE(TWO PIN TO TWO PIN)		

LED UTILITY T8 EMPTY BATTEN

	Power Factor	: -		
	CRI	: -		
	Base	: G13		
	Beam Angle	: -		
	Voltage	: 220 - 240		
	Lifetime (hours)	: -		
	CCT (K)	: -		
		LED-U-T8 EMPTY BATTEN-600MM-TTR-CT LED-U-T8 EMPTY BATTEN-1200MM-TTR-CT LED-U-T8 EMPTY BATTEN-1200MM-SINGLE-CT	- - -	10 10 30

LED UTILITY T8 EMPTY BATTEN 1200MM

	Power Factor	: -		
	CRI	: -		
	Base	: -		
	Beam Angle	: -		
	Voltage	: -		
	Lifetime (hours)	: -		
	CCT (K)	: -		
		LED-U-T8 EMPTY BATTEN-1200MM-DBL-CT	-	30

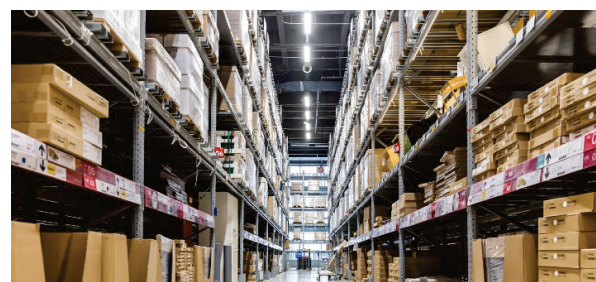

Light Source

LED T8 TUBE

TRUE COLOR WITH PROFESSIONAL LIGHT




Professional Lighting



Intimate Experience



Ultimate Quality



Eye Care



Photo	General Information	Product Description	Lumen (lm)	Packing Quantity (Pcs)
LED UTILITY1 T8 TUBE				
	Power Factor : 0,5 CRI : 70 Base : G13 Beam Angle : 200° Voltage : 220 - 240 Lifetime (hours) : 15.000 CCT (K) : 3000 / 4000 / 6500	LED-T8-U1-S-9W-600MM-II LED-T8-U1-S-18W-1200MM-II	900 - 950 1.800 - 1.900	25 25
LED ECOMAX1 T8 TUBE				
	Power Factor : >0,9 CRI : >80 Base : G13 Beam Angle : 200° Voltage : 220 - 240 Lifetime (hours) : 20.000 CCT (K) : 3000 / 4000 / 6500	LED-E1-T8-600MM-10W-GLASS-CT LED-E1-T8-1200MM-20W-GLASS-CT	950 - 1.100 2.000 - 2.100	25 25
LED PERFORMER1 T8 TUBE				
	Power Factor : 0,9 CRI : 80 Base : G13 Beam Angle : 200° Voltage : 220 - 240 Lifetime (hours) : 40.000 CCT (K) : 4000 / 6500	LED-P1-T8-1200MM-18W-120LM/W-PC	2.200	25
LED PERFORMER2 T8 TUBE				
	Power Factor : 0,9 CRI : 80 Base : G13 Beam Angle : 200° Voltage : 220 - 240 Lifetime (hours) : 50.000 CCT (K) : 6500	LED-P2-T8-1200MM-15W-150LM/W-PC	2.200	25
LED UTILITY T8 TUBE				
	Power Factor : 0,5 CRI : 70 Base : G13 Beam Angle : 200° Voltage : 220 - 240 Lifetime (hours) : 15.000 CCT (K) : 3000 / 4000 / 6500	LED-T8-U2-DBL-9W-600MM-II LED-T8-U2-DBL-18W-1200MM-II	900 - 950 1.800 - 1.900	25 25

LED STRIP

NEW FPC STRIPS  **↑30%**
Heat Dissipation
A BREAK FROM THE NORM

Professional Lighting



Higher
Brightness



Light
Transmittance



Uniform
Light Colors



Ra>80



Ultimate Quality



5yrs Care Free



650°C Antiflaming



Anti-shock



Energy Saving



Nemko Approved



2yrs Warranty

Eye Care



No Blue Light



Flicker Free



Intimate Experience



Easy to Fix



All-Match

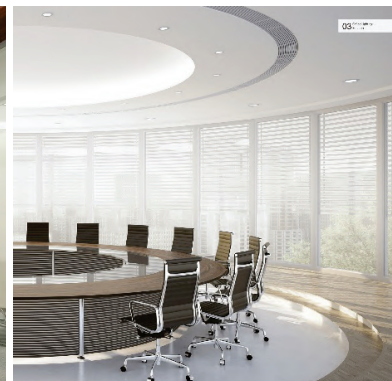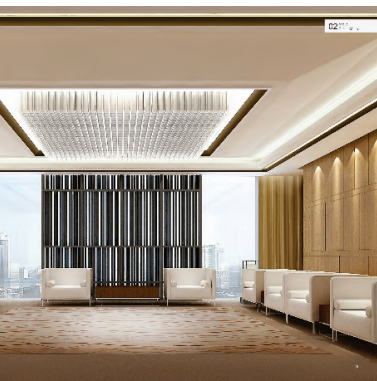

Light Source

Photo	General Information	Product Description	Lumen (lm)	Packing Quantity (Pcs)
LED ECOMAX STRIP DC 12V BARE				
	Power Factor : 0,9 CRI : >80 Base : - Beam Angle : 120° Voltage : DC12 Lifetime (hours) : 15.000 CCT (K) : 2700 / 3000 / 4000	LED-E-12/2835-01-6W/60-BARE-5M	620 - 680	80roll
LED ECOMAX STRIP DC 12V TUBE				
	Power Factor : 0,9 CRI : >80 Base : - Beam Angle : 120° Voltage : DC12 Lifetime (hours) : 15.000 CCT (K) : 2700 / 3000 / 4000 / 6500	LED-E-12/2835-01-6W/60-TUBE-5M	590 - 660	40roll
LED ECOMAX STRIP DRIVER DC 12V				
	Power Factor : 0,9 CRI : - Base : - Beam Angle : - Voltage : 220 - 240 Lifetime (hours) : 25.000 CCT (K) : -	LED-E-STRIP-DRIVER-30W-DC12V LED-E-STRIP-DRIVER-60W-DC12V	- -	20 20
LED ECOMAX STRIP DC 24V TUBE				
	Power Factor : 0,9 CRI : 80 Base : - Beam Angle : - Voltage : 24 Lifetime (hours) : 20.000 CCT (K) : 3000 / 4000 / 6500	LED-E-24/2835-5W/42-TUBE-10M LED-E-24/2835-10W/98-TUBE-10M	570 1.100	1 roll 1 roll
LED ECOMAX STRIP DC 24V				
	Power Factor : 0,9 CRI : 80 Base : - Beam Angle : - Voltage : DC 24 Lifetime (hours) : 20.000 CCT (K) : 3000 / 4000 / 6500	LED-E-24/2835-5W/42-BARE-10M LED-E-24/2835-10W/98-BARE-10M	570 - 600 1.100 - 1.200	1 roll 1 roll
LED ECOMAX STRIP DRIVER 24V				
	Power Factor : - CRI : - Base : - Beam Angle : - Voltage : 24 AC Lifetime (hours) : 20.000 CCT (K) : -	LED-E-STRIP-DRIVER-60W(1*2)-24CV LED-E-STRIP-DRIVER-60W(1*1)-24CV LED-E-STRIP-24V-INPUT CONNECTOR-5A-BARE LED-E-STRIP-24V- MIDDLE CONNECTOR-5A-BARE LED-E-STRIP-FIXING CLIP-TUBE	- - - - -	1 1 20 20 100
LED STRIP HV 220V				
	Power Factor : 1,0 CRI : 80 Base : - Beam Angle : 120° Voltage : 220 - 240 Lifetime (hours) : 15.000 CCT (K) : 3000 / 4000	LED-STRIP-2835-HV-8W/M-50M-DBL	550	1roll (50M)

